




Low Clearance torque wrench

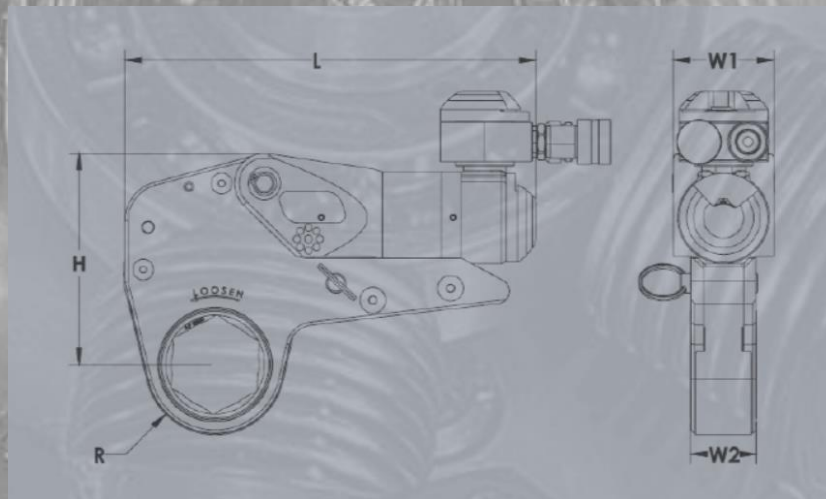

Dimension metric

Model	CNZ-02	CNZ-05	CNZ-10	CNZ-18	CNZ-25	CNZ-42
Torque (Nm)	329 - 2.286	786 - 5.224	1.549 - 11.045	2.724 - 18.157	3.780 - 25.881	6.205 - 41.968
Weight (kg)	0,9	2	3,4	5,5	6,7	10,9
H (mm)	102,1	136,4	170,3	204	231	272,5
W1 (mm)	49,3	65,8	82	98,4	111	131,5
W2 (mm)	31,8	42,4	53,9	63,6	72	84,5
L (mm)	194,6	266	320,1	371,3	364	427,2
R (mm)	26 - 44,7	34 - 58,9	45 - 73,4	59 - 88,1	67 - 98,3	78 - 121,9
HEX (mm)	19 - 60	34 - 80	41 - 100	50 - 120	75 - 120	90 - 165

Dimension imperial

Model	CNZ-02	CNZ-05	CNZ-10	CNZ-18	CNZ-25	CNZ-42
Torque (ft.lbs)	243 - 1.686	580 - 3.853	1.142 - 8.146	2.009 - 13.392	2.790 - 19.100	4.577 - 30.967
Weight (lbs)	1.98	4.41	7.50	12.13	14.85	24.03
H (inch)	4.0	5.4	6.7	8.0	9.1	10.7
W1 (inch)	1.9	2.6	3.2	3.9	4.4	5.2
W2 (inch)	1.3	1.7	2.1	2.5	2.8	2.2
L (inch)	7.7	10.5	12.6	14.6	14.3	16.8
R (inch)	1.1 - 1.8	1.3 - 2.3	1.8 - 2.9	2.4 - 3.5	2.6 - 3.9	3.1 - 4.8
HEX (inch)	3/4" - 2 3/8"	1 5/16" - 3 1/8"	1 5/16" - 4 1/8"	2" - 4 1/2"	2" - 4 1/2"	3 1/2" - 6 1/2"